


Lay the parquet onto the pre-glued surface and manually press the board into the adhesive bed, leaving a 1–2 mm space between the plywood and the parquet bottom.

[ATTENTION! DO NOT EXPOSE THE SPORTS PARQUET FLOOR TO DYNAMIC STRESS FOR 24 HOURS AFTER INSTALLATION, AS THIS IS THE TIME REQUIRED FOR SETTING AND HARDENING OF THE ADHESIVE, DURING WHICH ANY VERTICAL OR HORIZONTAL LOAD APPLIED TO THE GLUE LAYER CAN COMPROMISE THE RESULT. AFTER 24 HOURS UPON INSTALLATION THE BONDS WILL HAVE FINALLY SETTLED AND THE PARQUET CAN BE EXPOSED TO LOADING.]

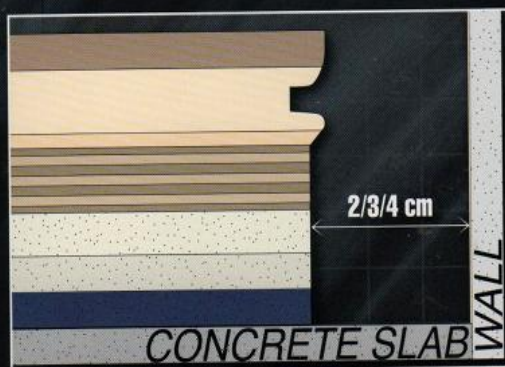

During installation the expansion clearance corresponding to the hall size shall be observed. Use spacer planks or iron rods to help maintain the clearance.

Gym size	Expansion clearance along the perimeter
< 500 m ²	2 cm
500 – 1000 m ²	3 cm
> 1000 m ²	4 cm

APPLYING FLOOR MARKING TO THE GRABO SPORTS PARQUET FLOORS

The product named Grabocolor is recommended for marking the Grabo sports flooring. The product is available in five colors: white, yellow, blue, black and red.

Grabocolor is a polyurethane-based two-pot paint. It ensures excellent adherence to the parquet varnish and the wooden surface and provides durable, abrasion-proof marking.

MAINTENANCE AND CLEANING GUIDE FOR THE GRABO SPORTS PARQUET FLOORS

Regular cleaning and maintenance are crucial for the durability and attractive appearance of the parquet floor. The maintenance schedule for the parquet floor is primarily determined by the intensity of its use. For preservation purposes routine (daily) cleaning and periodical general cleanings are recommended. Use caution when choosing detergents for cleaning the parquet floor and ask manufacturers' advice.

Preventive measures

Most of debris and contamination can be kept off the parquet floor by setting and regular cleaning of dirt traps (mats) in front of the entrance doors and in the halls.

General cleaning, routine (daily) cleaning

- ↻ Remove loose debris, dirt and sand by sweeping or vacuum cleaning the surface;
- ↻ use damp (well wrought) dust mop and water to remove stains, spots and sticky contaminations. Dilute parquet care products in the water used for cleaning to get the concentration advised by the manufacturer. The cleaning can be done manually or with a cleaning machine.