

...with CLP

Our aim is to keep the main technical parameters during the whole lifetime of the flooring. In order to reach it, we have developed an innovative top layer composition called Cross Linked Polymer System (CLP).


Due to the high density of the chemical cross links, on one hand CLP reduces the



adhesion of the contamination on the surface, **improving the cleanability**, on the other hand **increases the wear resistance** thus the lifespan of the flooring. Thanks to CLP our floors preserve their surface properties (slip, cleanability, gloss) for a long time.



graboflex Start

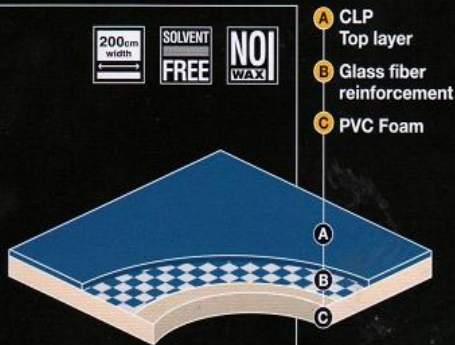


Width EN426	200 cm
Standard roll length EN426	20 m ± 10%
Thickness EN428	4,0 mm

- A CLP Top layer
- B Glass fiber reinforcement
- C PVC Foam



grabo Rocket

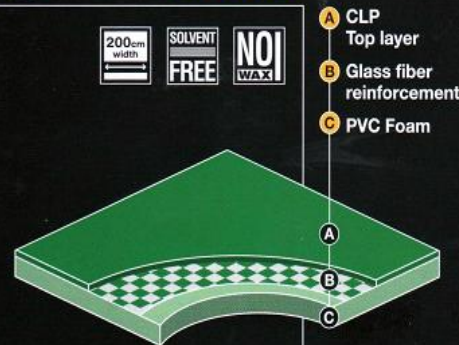

Width EN426	200 cm
Standard roll length EN426	15 m ± 10% 20 m ± 10%
Thickness EN428	3,8 mm

- A CLP Top layer
- B Glass fiber reinforcement
- C PVC Foam



Sport flooring specially for badminton and for table tennis



4000-659



4000-660



4387



7533



4000-665



4181-651

