


...with TECH Surface



graboSport
Extreme 80
Supreme 67
Elite 60



- A TECH Surface
- B Glass fiber reinforcement
- C Combined double-foam backing

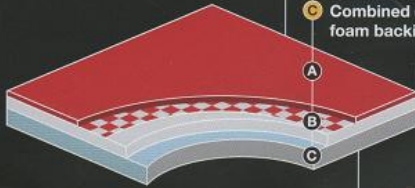

Extreme 80 Supreme 67 Elite 60

Width EN426	200 cm	200 cm	200 cm
Standard roll length EN426	15 m ± 10%	15 m ± 10%	20 m ± 10%
Thickness EN428	8,0 mm	6,7 mm	6,0 mm

complying with EN 14904



Extreme 80
Supreme 67



Elite 60



grabo
Stamina



- A TECH Surface
- B Glass fiber reinforcement
- C Compact backing



Width EN426	200 cm
Standard roll length EN426	20 m ± 10%
Thickness EN428	2,0 mm

complying with EN 14904 on subfloor



7483 8,0 mm 6,7 mm
6,0 mm 2,0 mm



6170 8,0 mm 6,7 mm
6,0 mm 2,0 mm



7143 8,0 mm 6,7 mm



6470 8,0 mm 6,7 mm



1360 8,0 mm 6,7 mm



3096 8,0 mm 6,7 mm



3338 8,0 mm 6,7 mm
6,0 mm 2,0 mm



4289 8,0 mm 6,7 mm



2000-378 8,0 mm 6,7 mm



2561-378 8,0 mm 6,7 mm



3151-378 8,0 mm 6,7 mm
6,0 mm 2,0 mm



6107-378 8,0 mm 6,7 mm



2519-371 8,0 mm 6,7 mm
6,0 mm 2,0 mm



2209-371 8,0 mm 6,7 mm



3111-371 8,0 mm 6,7 mm